

#### 4-8 Ferndell St SOUTH GRANVILLE NSW 2142

PO Box 3107 WETHERILL PARK NSW 2164

Ph: (02) 9632-5000 Fx: (02) 9632-5011 ABN: 18 165 515 257

## PRODUCT DATA AND APPLICATION SHEET

PRODUCT NAME Changeover Switch 40amp Enclosed


**PRODUCT CODE** UKT3-4-8213-E40

**DESCRIPTION** Changeover Switch 40amp Enclosed 4 Pole

BOX QUANTITY 1 OUTER QUANTITY 24

#### **FEATURES**

- Changeover switch rotary with OFF, 4 Pole, Enclosed 40Amp, engraved 1 0 2 mounted in a large fibox polycarbonate box, front operated.
- The tesla cam switches are designed, constructed and tested in accordance with national and international standards including VDE, DIN, IEC, UL and CSA to provide you with a reliable.
- A wide range of amp ratings is available dependent on model, including 20A, 32A, 63A and 100A and ensures a complete solution is available for all your applications.

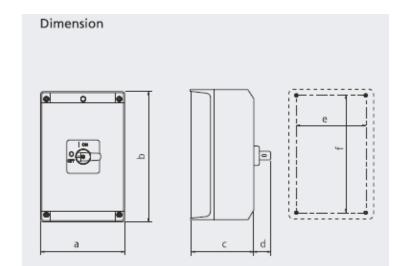

Frame	UKT3-4-8213-E40
а	116
b	176
С	101
d	35
е	90
f	165



### 4-8 Ferndell St SOUTH GRANVILLE NSW 2142

PO Box 3107 WETHERILL PARK NSW 2164

Ph: (02) 9632-5000 Fx: (02) 9632-5011 ABN: 18 165 515 257

# PRODUCT DATA AND APPLICATION SHEET

PRODUCT NAME Changeover Switch 40amp Enclosed (Continued)

SPECIFICATIONS		
Product Series	UKT	
Un, Nominal Operational Voltage, AC	690 V AC	
Ui, Rated Insulation Voltage	690 V (rms)	
Uimp, Impulse Withstand Voltage	6 kV	
Rated Frequency	50/60 Hz	
Number of Poles	4	
Ith, Thermal Current, Open	40 A	
le, Rated Operational Current, AC-21a, 690V	40 A @ 690V	
IP Rating	IP54	
IP Rating Front	IP66	
Switching Function	Changeover with Off	
Mounting	Enclosed	
Height	176 mm (b)	
Width	116 mm (a)	
Depth	101 mm (c)	

